

# Powered Drive Straddle Truck **BLUE GIANT**<sup>®</sup>

## BGS-25

Short turning radius makes it an excellent choice for narrow aisles, tool rooms or street level loading.

### CAPACITY

- 2500 lb (1134 kg) at 24" (610 mm) load center

### BATTERY

- 24-volt industrial battery or battery pack
- Minimum battery weight: 340 lb (154 kg)
- Ah capacity (min/max): 180/255
- Compartment dimensions (open w/ rollers): 26.4" x 9.1" (671 x 231 mm)
- Connector: SB-175 Gray—A-11

### SPEED

- ZAPI AC-0 travel controller
- **EMPTY:** 0 - 3.4 mph (5.5 kph)
- **LOADED:** 0 - 3.1 mph (5 kph)
- **LIFT - EMPTY:** up to 33 fpm
- **LIFT - LOADED:** up to 25 fpm with 2500 lb (1134 kg) load
- **LOWERING - EMPTY:** up to 29 fpm
- **LOWERING - LOADED:** up to 57 fpm with 2500 lb (1134 kg) load

### WEIGHT

- 1943 lb (881 kg) chassis only

### TIRES / WHEELS

- **DRIVE:** 9" x 3" (229 x 76 mm) polyurethane
- **DUAL LOAD:** (2) 3.9" x 2" (99 x 51 mm) polyurethane

### HYDRAULICS

- Hard chrome lift cylinder
- Pump unit including motor, gear pump, solenoid, and pressure compensated lowering valves that regulates lowering speed

### ELECTRICAL

- ZAPI AC-0 travel controller with AC drive motor provides high torque throughout entire drive range
- Low-maintenance brushless design
- Automatic resetting circuit breaker
- One piece micro switch design

### BRAKES

- Regenerative electromagnetic brake mounted on motor armature shaft, multiplying braking power through the transmission
- Brake is applied when control arm is in the vertical or horizontal handle position
- Reduced speed when forks above 12" (305 mm) fork height
- Neutral braking-anti-roll back on ramps



### OPERATION / CONTROLS

- Ergonomic operator handle with travel, lift, and lower functions
- Wrap-around guard
- Reversing switch
- Thumb control and horn
- Creep speed function while handle is at 1.5° back-tilt from vertical
- Gas-assisted spring handle
- Plexiglas safety screen

### TRANSMISSION

- Vertically mounted drive motor direct mounted to gear housing
- Oil-bathed ZF GK10 hypoid bevel gear drivetrain
- State-of-the-art optimized gear technology provides minimal envelope circle, zero maintenance, and low noise level

### FRAME AND MAST

- Bolt-on high-visibility I-beam construction
- Dual lifting chains
- 3" (76 mm) wide adjustable straddle legs
- Straddle leg inside dimension (ID) can be set at 38" (965 mm) to 50" (1270 mm) in 4" (102 mm) increments
- Class II ITA fork carriage with 36" (914 mm) tall load backrest

### BEARINGS

- **DRIVE WHEEL:** Tapered roller bearings sealed in oil bath
- **LOAD WHEELS:** Sealed ball bearings

**ACCESSIBILITY**

- Removal of two piece power head cover exposes major components for inspection and maintenance
- Drive wheel can be removed with one nut



**OPTIONAL EQUIPMENT**

- 48" (1219 mm) tall load backrest
- Cold conditioning
- Battery 255 Ah 5.9 kWh

**Right Angle Stacking Aisle Dimensions**

Load Length	Load Width			
	36"	40"	42"	48"
36"	66"	66"	68"	69"
42"	66"	66"	68"	69"
48"	80"	80"	79"	77"

- Aisle dimensions listed have zero clearance
- Add 12" for ease of use.

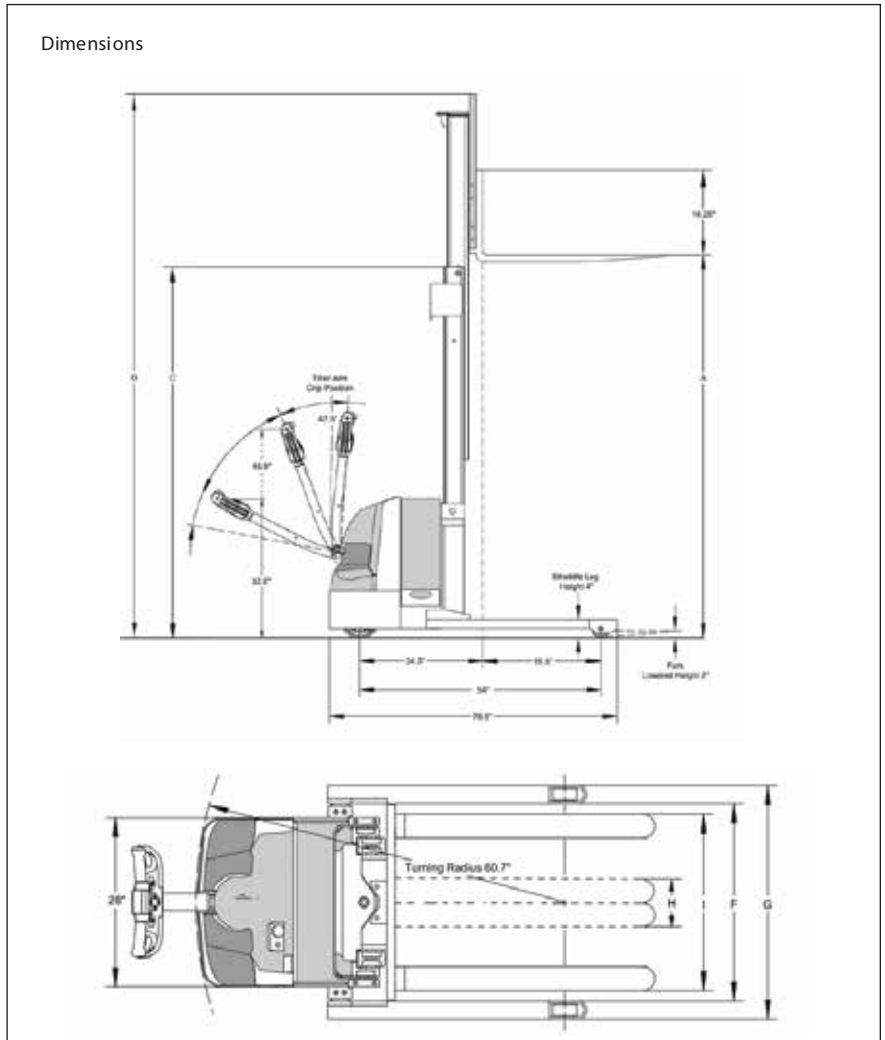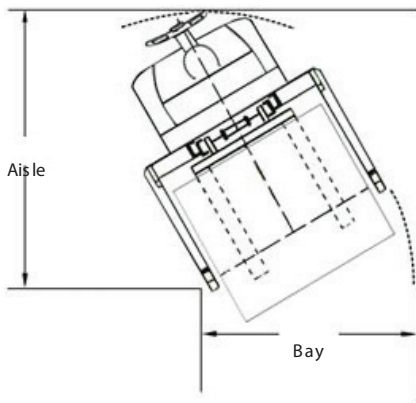

Note: Aisle dimensions listed above assume the bay width to be straddled OD plus 2" (1" on either side of straddle leg). Straddle OD is the load width plus 8". \*For metric conversion multiply inches by 25.4.

Model#	Lift Height	Col Height	Free Lift	Ext Height w/LBR	Adj Straddle Leg (4" Increments)		Forks		Ship Weight w/o Battery
	A	C		D	ID	OD	ID	OD	
				F	G	H	I		
2500 lb Capacity @ 24" Load Center   TA Class II Fork Carriage									
BGS-25-106	106"	71"	6"	142"	38 to 50"	44 to 56"	8"	30"	1726 lb
BGS-25-130	130"	83"		165"					1816 lb
BGS-25-142	142"	89"		178"					1858 lb
BGS-25-153	153"	95"		189"	1943 lb				
BGS-25-157	157"	71"	50"	193"	42 to 50"	48 to 56"			2156 lb

\* Complete weight includes truck, battery and charger.



**LONDON, Ontario**  
 331 Sovereign Road  
 London, ON N6M 1A6  
 Phone: 519-452-7770  
 Email: info@liftdepot.com

**WINDSOR, Ontario**  
 2-5900 Rhodes Drive  
 Windsor, ON N8N 2M1  
 Phone: 519-988-0006  
 Email: info@liftdepot.com

**STRATFORD, Ontario**  
 557 Lorne Ave. East  
 Stratford, ON N5A 6S4  
 Phone: 519-273-7664  
 Email: info@liftdepot.com

**CAMBRIDGE, Ontario**  
 45 Barnes Road  
 Cambridge, ON N3H 4R7  
 Phone: 519-653-4713  
 Email: info@liftdepot.com

[WWW.LIFTDEPOT.COM](http://WWW.LIFTDEPOT.COM)